








- Compact Design
- **■** Compact Size and Lightweight
- Easy to Use
- EMI / RFI Filter
- Build-in AVR

- Build-in Sealed Lead Acid Battery
- Audible and Visual Indicators
- High Effiency
- High Reliability
- Support Full Load (EOD)

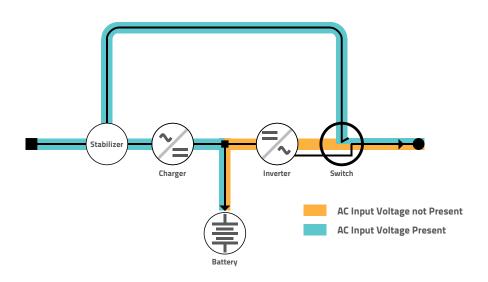





ITEM MODEL		UNITS	SPECIFICATION		REMARKS
			CP700	CP1400	
CAPACITY		VA/W	700 / 350	1400 / 700	MAXIMUM
ACINPUT	VOLTAGE	V	160 ~ 250		
	CURRENT	Α	1.6	2.9	MAX. LOAD & CHARGER
	FREQUENCY	Hz	50 ± 3		
	PROTECTION	Α	3.15	6.3	FUSE
DC INPUT	INTERNAL BATTERY		1 x 12V, 7AH	2 x 12V, 7AH	SEALED LEAD ACID BATTERY
INVERTER OUTPUT	WAVE FORM		SYNTHESIZED SINEWAVE		PWM
	VOLTAGE	V	220 ± 5%		
	FREQUENCY	Hz	50 ± 1%		
	EFFICIENCY	%	> 80		
СНС	ТҮРЕ		CONSTANT VOLTAGE		
	VOLTAGE	V	13.5	27.0	
	CURRENT	Α	1.5		MAXIMUM
TRANSFER TIME		ms	≤ 4		
BACK UP TIME		min	10		DEPENDING ON LOAD
INDICATOR			LED & BUZZER		
OPERATION TEMPERATURE		°C	0 ~ 40		
DIMENSION		mm	345 x 95 x 150	390 x 145 x 195	D x W x H
WEIGHT		Kg	6	12	NETTO
			7	14	GROSS

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

