

Uninterruptible Power Supply



- Off Line Sinewave UPS
- Continuous Sinewave Output
- High Efficiency
- High Reliability
- Build in AVR
- EMI / RFI Filter
- Audible and Visual Indicator
- Network (RJ45) Protector
- Communicate With Most LAN System and Stand Alone PC, Auto Save and Auto Shutdown
- Rack Mount 19"
- Easy to Install


ITEM		UNIT	SPECIFICATION		REMARKS
MODEL			RN1200	RN2000	
Capacity		VA/W	1200/600	2000/1000	
AC INPUT	Voltage	V	160 ~ 250		
	Frequency	Hz	50 ± 3		
	Protection	A	6.3	10	Fuse
DC INPUT	Voltage	V	24	36	
	Internal Battery		2 x 12V; 7AH	3 x 12V; 7AH	Sealed Lead Acid Battery
	Protection		Fuse		
CHG	Topology		Constant Voltage		
	Floating Voltage	V	27.0	40.5	
INVERTER OUTPUT	Wave Form		Sinewave		
	Distortion		< 3% THD		Load 0 ~ 100%
	Topology		Pulse Width Modulation (PWM)		
	Voltage	V	220 ± 5%		
	Frequency	Hz	50 ± 1%		
	Efficiency	%	± 80		At Full Load
Transfer Time		ms	≤ 4		
Back Up Time		min	10		At Nominal Load
BUZZER	AC Input Low/ Fail		Intermittent Sound With 4 Seconds Interval		
	AC Input High		Intermittent Sound With 1 Second Interval		
	Battery Low		Intermittent Sound With 1 Second Interval		
Operation Temperature		°C	0 ~ 40		
Dimension		mm	390 x 490 x 90	485 x 490 x 90	D x W x H
Weight		Kg	16.0	21.5	NETTO
			17.5	23.5	GROSS

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.



REAR PANEL RN1200 & RN2000

Contact Person

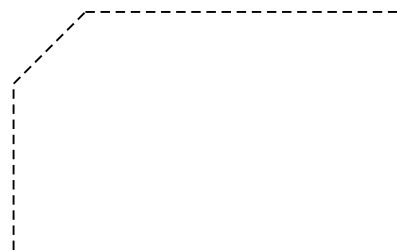

481-41E0010-310